

LIZ-CHOIR WIRELESS

Pro Slim Boom Microphone
with Wireless Capability



Features:

- Condenser microphone with long, slim boom and jumper cable to connect to Shure® Wireless bodypack. (Not Included).
- Interchangeable capsules including Hypercardioid, Omni, and Cardioid for the perfect polar pattern for any situation.
- Used for recording acoustic instruments, ambient room miking, symphonic area miking and overheads for just about anything from choirs and group vocals to drums and more.




Specifications:

- Element : Back Electret Condenser
- Polar Patterns : Hypercardioid / Omni / Cardioid
- Frequency Range : 50Hz ~ 20kHz
- Sensitivity : -58dB ± 3dB (0dB = 1v / u_{bar} @ 1KHz)
- Impedance : 250 Ω ± 30% @ 1KHz
- Operating Voltage : Phantom Power 48V ~ 52V DC
- Dimensions : .5" x 2.6" (Mic) 50" (Boom) 25.5' (Cable)
- Connector : 12" T3 to T4 Jumper / 3 pin XLRM



*Bodypack
Not Included

Frequency Graph:

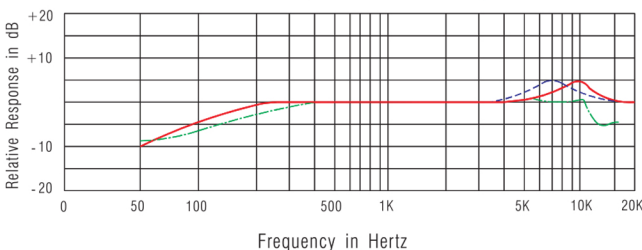

Polar Patterns:

